


针刺机

Needle-Punching Machine

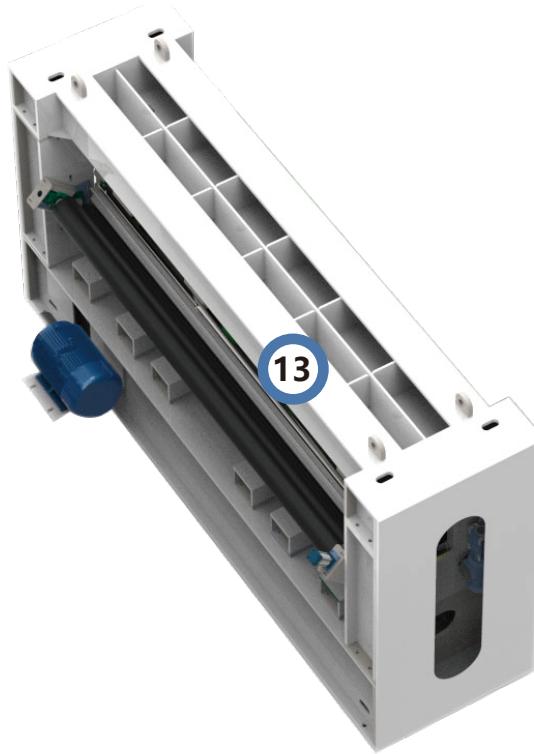

机器特点

- 主体机架采用优质钢板焊接而成；主传动采用偏心连杆结构，配重盘平衡；
- 导柱材料采用合金钢，经多道热处理，表面镀硬铬，超精磨而成；
- 针板选用铝镁合金板，电脑数控机床加工针孔，布针无规则杂乱排列；
- 输出对辊镀硬铬，气压式调节输出辊压力并辊面滚花。

Features

- The main frame is constructed from high-quality steel plates with welded assembly for superior strength and durability.
- Main transmission uses an eccentric connecting rod structure with a counterweight disc for balanced, stable operation.
- Guide columns are made from alloy steel, subjected to multiple heat treatments, and finished with hard chrome plating and precision grinding.
- Needle boards are manufactured from aluminum-magnesium alloy panels; needle holes are drilled by CNC machine tools, and the needles are arranged in a random pattern for optimal distribution.
- Output rollers are hard chrome plated, pressure-adjusted pneumatically, and feature knurled surfaces for improved handling.

机器参数 Parameters

机幅宽度： Machine Width:	2800mm	植针密度： Needle Density:	4000-5000枚/米 4,000-5,000 needles/meter
针刺频率： Punching Frequency:	600-800 RPM/min	走布速度： Fabric Feed Speed:	1-8 米/分钟 1-8 meters/minute

天津再登高智能制造有限公司

地址：天津宝坻经济开发区天宝南环路3号B楼-2号

邮箱：sales@raiseagain.tech

网址：www.raiseagain.tech

400-166-8581

Tianjin RaiseAgain SM CO., Ltd.

Address: No.2, Block B-3, Tianbao Nanhuan Road, Baodi Economic Development Area, Tianjin, China. **0086-22-6035 9933**
Email: sales@raiseagain.tech www.raiseagain.tech