


全自动针梭两用铺布机

Automatic Spreading Machine

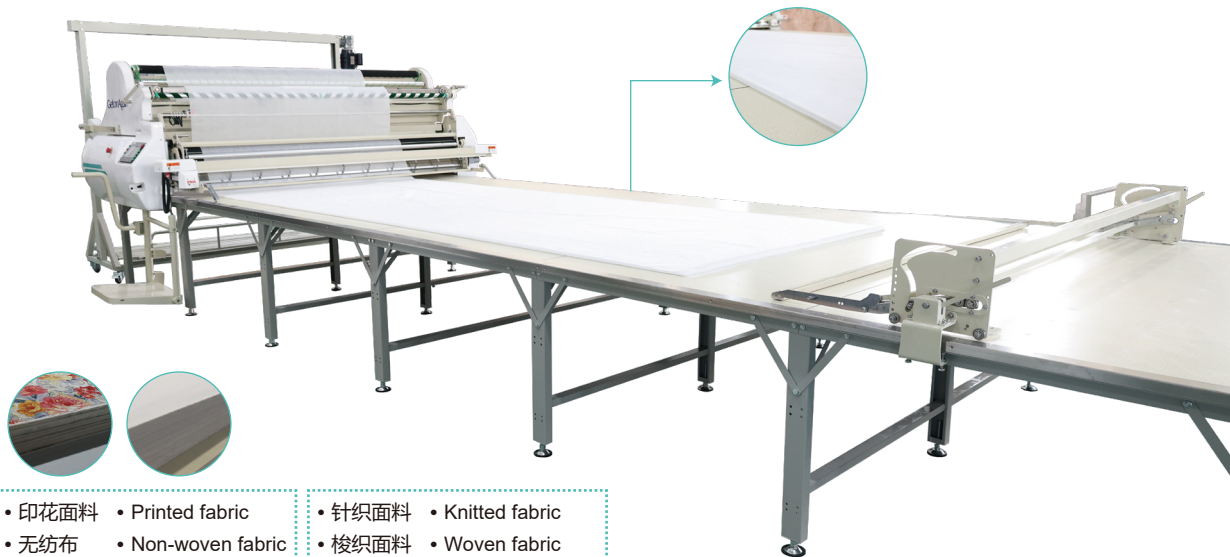

- | | |
|--------------------------|----------------------------|
| • 印花面料 • Printed fabric | • 针织面料 • Knitted fabric |
| • 无纺布 • Non-woven fabric | • 梭织面料 • Woven fabric |
| • 牛仔面料 • Denim fabric | • 皮革面料 • Synthetic leather |

适用范围

针梭两用，适用面广，适合T恤、童装、家居服、玩具布料。

机器特点

- 液晶触屏：轻松设定铺布方式、长度、速度、数量及段落，操作直观简便。
- 无料自动停机：布料铺完时系统自动停止作业，并自动返回铺布原点。
- 智能裁刀装置：智能可调节裁刀装置，速度、距离可调，裁切整齐稳定。裁刀和主机可以快捷简单的进行拆装。
- 布料预松装置：预先释放布料张力后再铺放，消除铺布张力并保持铺布质量的一致性。
- 自动对边装置：在铺布运作过程中可以正确做到自动对边，提升铺布质量。
- 自动上升装置：随着布料铺叠高度的增加，系统控制刀架自动上升，配合铺布。
- 紧急停止装置：于裁床两边设有停机用钢索，可随时于裁床任何位置拉动钢索做紧急停机，确保操作安全。
- 自动拨边装置：可随布料的宽度及张力作有效的边缘展布调整，完美解决布料卷边现象。

标配装置 Standard Equipment

- | | |
|---------------|---|
| • 自动拨边装置 | • Automatic Edge Poking Device |
| • 一次拨边装置 | • One-time Poking Device |
| • 自动伺服送布装置 | • Automatic Servo Feeding Fabric System |
| • 自动对边装置 | • Automatic Edge Alignment Device |
| • 人机交互系统 | • Human-Machine Interaction System |
| • PLC控制系统（松下） | • PLC Control System (Panasonic) |

Application

Dual-use for both knit and woven fabrics, suitable for T-shirts, children's clothing, loungewear, and toy textiles.


Features

- LCD Touchscreen: Easily set the spreading method, length, speed, quantity and sections, with intuitive as well as simple operation.
- Automatic stop when material Runs Out: Automatically stops operation when the fabric is finished spreading and returns to its starting point.
- Smart Cutting Device: The intelligent adjustable cutting device allows for adjustable speed and distance, ensuring neat and stable cuts. Cutting unit and main unit can be quickly and easily detached or attached.
- Fabric Pre-Relaxation Device: Releases fabric tension in advance before spreading, eliminating spreading tension and maintaining consistency in spreading quality.
- Automatic Edge Alignment Device: Ensures accurate automatic edge alignment during the spreading process, enhancing the quality of the spread fabric.
- Automatic Lifting Device: As the height of the fabric stack increases, the system controls the cutter rack to automatically rise, aligning with the spreading process.
- Emergency Stop Device: Steel cables are installed on both sides of the cutting table, allowing for an emergency stop by pulling the cable from any position on the table, ensuring operational safety.
- Automatic Edge Poking Device: Effectively adjusts the edge spreading according to the fabric's width and tension, perfectly resolving the issue of fabric edge curling.


铺布方式 Spreading Method



单向铺布
One-way spreading



之字形铺布
Zigzag spreading



多段式铺布
Multi-stage spreading


全自动针梭两用铺布机 Automatic Spreading Machine



单压布装置 (前)
Single Fabric Pressing Device (Front)




后压布装置
Rear Fabric Pressing Device

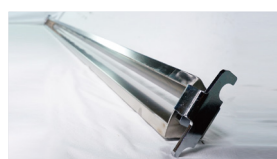

Z型装置
Z-Type Device



十六边形送布辊轮
Hexadecagonal (16-Sided) Feed Roller

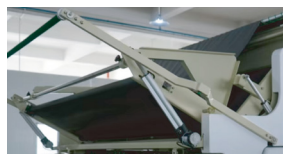


加大布斗
Enlarged Cloth Bucket



圆筒布装置
Tubular Fabric Device




二次拨边装置
Secondary Edge Guiding Device




除静电装置
Anti-static Device



标准美耐台板
Standard Mainer Table



传送带式台板
Conveyor Belt Type Table

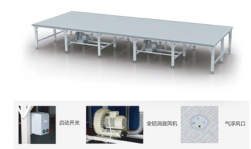

气浮台板
Air Flotation Table



移动台板
Mobile Table



上布机
Cloth Feeding Machine



站人平台
Operator Platform

主要参数 Parameters

型号: Model:	GOA-SM,KW-1-1000×1600 -C-KW80-NA-1P220	GOA-SM,KW-1-1000×1900 -C-KW80-NA-1P220	GOA-SM,KW-1-1000×2100 -C-KW80-NA-1P220
铺布宽度: Maximum Fabric Width:	1600mm	1900mm	2100mm
裁台宽度: Table Width:	1830mm	2130mm	2330mm
机器尺寸: Machine Dimensions(LxWxH):	1900×2300×1250mm	1900×2600×1250mm	1900×2800×1250mm
铺布高度: Stacking Height:	单铺230mm (可加高至300mm) /双铺160mm One-way 230mm (Can be up to 300mm) / Zigzag160mm		
布卷重量: Fabric Weight:	80kgs max	布卷直径: Diameter of Fabrics: Customized to 850mm)	行走速度: Moving Speed: 106m/min max.
机器重量: Machine Weight:	400kg	马达功率: Motor Power: 1Kw	电源电压: Voltage: 1P 220V/50Hz

机器尺寸可定制/Machine dimensions can be customized

天津再登高智能制造有限公司

地址: 天津宝坻经济开发区天宝南环路3号B楼-2号

邮箱: sales@raiseagaintech.com

网址: www.raiseagaintech.cn **400-166-8581**

Tianjin RaiseAgain SM CO., Ltd.

Address: No.2,Block B-3, Tianbao Nanhuan Road, Baodi Economic

Development Area, Tianjin, China. **0086-22-6035 9933**

Email: sales@raiseagaintech.com

www.raiseagaintech.com

20250913