

电脑多头旋梭绗缝机 (H型)


Computerized Multi-head Rotary-hook Quilting Machine (Model H)

2000RPM





适用范围 Application



适用于冬被, 夏凉被, 被盖, 床垫保护垫, 床垫等的多头绗缝。
Suitable for multi-head quilting of winter comforter, summer quilts, bed covers, mattress protector, mattress, etc.




152mm



0-76mm



76mm




机器特点

- 大旋梭多头绗缝机, 工作速度高达2000转/分, 大大提高了工作效率。
- 专用3倍大旋梭, 底线容量更大, 减少更换频率; 线迹美观, 无丢针、不起环。
- 触摸屏操作, 图形化界面, 清晰直观, 所有功能可视于同一界面。
- 全伺服电机驱动, 控制精准, 动力强劲。
- 针排距可从76mm-228mm任意调节, 实现特大花样绗缝, 下排针X向最多可移动针距的一半, 配合上针可完成各种花型的绗缝排针, 无需改变针位, 从而大大提高生产效率。
- 立姿换梭, 轻松快捷、改善工人劳动强度。
- 机头和旋梭零件特殊表面处理、微油润滑、经久耐用。
- 专用的旋梭和机针冷却功能, 保证高速运行时机器稳定。
- 专用的独立驱动压脚结构, 机器振动小, 运行平稳。

Features

- Double-row lock-stitch multi-head quilter, with large rotary hook, max. speed of 2000 rpm, greatly improves work efficiency.
- 3-Fold capacity rotary hook, less bobbin changing frequency; beautiful stitches, no lost stitch, no thread loops.
- Touch screen operation, graphical interface, clear and intuitive, all functions can be seen on the same interface.
- Full servo motor driving system, precise control and strong power.
- The needle pitch can be adjusted freely from 76mm to 228mm to realize quilting of extremely large patterns. The lower row of needles can move up to half of the needle pitch in the X direction. When working with the upper row of needles, it can complete quilting of various patterns without changing the needle position, thus greatly improving production efficiency.
- Bobbin change in standing position, easy and fast, reduce labor intensity.
- A dedicated feeding structure ensures sewing quality under different working conditions, featuring compact design and easy operation.
- A unique atomized oiling system provides high-volume lubrication for each machine head and rotary hook, ensuring stability during high-speed operation.
- The dedicated hook and needle cooling function ensures the stability of the machine during high-speed operation.
- The dedicated independent drive presser foot structure ensures low vibration and smooth operation of the machine.

设备连线应用 Device Connection Application

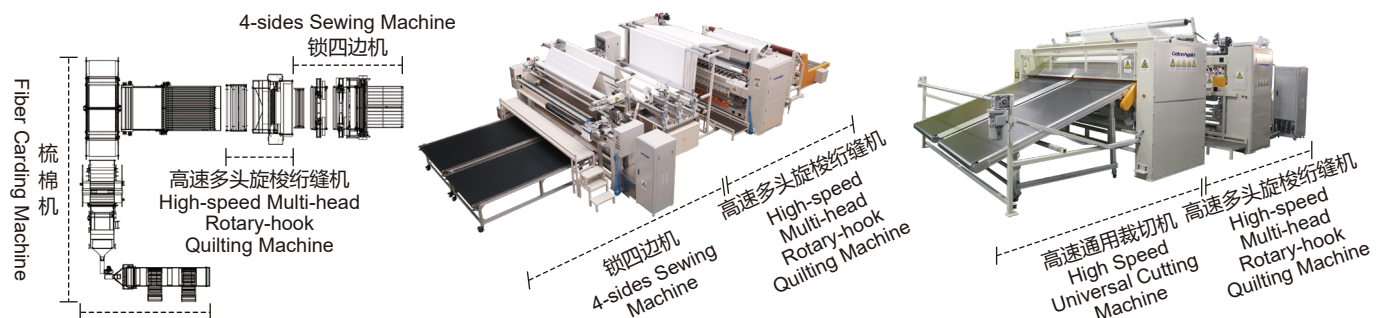

电脑多头旋梭绗缝机 (H型)

Computerized Multi-head Rotary-hook Quilting Machine (Model H)

机器参数 Parameters

绗缝克重: Quilting Density:	≤1000GSM	工作速度: Working Speed:	2000RPM	旋梭: 3倍大旋梭 Rotary Hook: 3 times large rotary hook	
步长: Stitch Length:	2mm-6mm	绗缝厚度: Sewing Thickness:	≤50mm	电源: Voltage:	380V 50Hz

推荐型号 Model

推荐型号 Model	头距 Head Distance	针排 Needle Row	直线落针 Straight Needle Drop	适用布幅宽度 Fabric Width
GOA-QC-NM-2000S(H)-13-420×2743-228.6-S50-VR3-NA-3P380	228.6	单排 Single Row	2743mm	2900mm
GOA-QC-NM-2000S(H)-9-420×2438-304.8-S50-VR3-NA-3P380	304.8		2438mm	2800mm
★ GOA-QC-NM-2000D(H)-14+13-304.8×1981-152.4-S50-VR3-NA-3P380	152.4	双排 Double Row	1981mm	2200mm
★ GOA-QC-NM-2000D(H)-10+9-304.8×2057-228.6-S50-VR3-NA-3P380	228.6		2057mm	2300mm
GOA-QC-NM-2000D(H)-12+11-304.8×2514-228.6-S50-VR3-NA-3P380	228.6		2514mm	2800mm
★ GOA-QC-NM-2000D(H)-6+7-304.8×1829-304.8-S50-VR3-NA-3P380	304.8		1829mm	2200mm
GOA-QC-NM-2000D(H)-8+7-304.8×2135-304.8-S50-VR3-NA-3P380	304.8		2135mm	2500mm


★ 畅销明星机型/Most popular model

主要配置 Machine Configuration



全新H型电脑控制系统，友好的人机界面，触控灵活，存储量大。

Brand-new computer control system, friendly HMI, flexible touch control, large storage capacity.

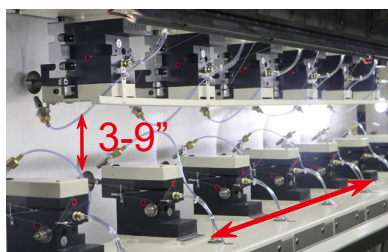

双排机型：双针排间距3-9英寸任意调节，下排机头可在半个头距内整体横移，花型设计更为多样。

Double-row quilter: the distance of two needle rows are adjustable within 3-9 inches, quilting heads in lower row could move horizontally as a whole, up to half a head distance, making the pattern design more diversified.



雾化喷油系统：自动、精准、无污，可直接润滑至上机头壳体内零件及下机头旋梭导轨，根据设定参数自动喷油雾。

Atomized oil lubrication system: automatic, precise, pollution-free, can directly lubricate the parts inside of upper heads cover or rotary hook guide rail of lower heads, automatically spraying oil mist by set parameters.



旋梭冷却结构，保证旋梭高速运行。
Rotary shuttle cooling structure ensures high-speed operation of rotary shuttle.



无梭芯底线+旋梭
Pre-wound bobbin thread + coreless rotary hook



梳棉线专用联线装置（选配）
Special connecting device for fiber carding line (Optional)

天津再登高智能制造有限公司

地址：天津宝坻经济开发区天宝南环路3号B楼-2号

邮箱：sales@raiseagaintech.com

网址：www.raiseagaintech.cn **400-166-8581**

Tianjin RaiseAgain SM CO., Ltd.

Address: No.2,Block B-3, Tianbao Nanhuan Road, Baodi Economic Development Area, Tianjin, China. **0086-22-6035 9933**

Email: sales@raiseagaintech.com

www.raiseagaintech.com