


全自动拉布机 (2-6卷)


Automatic Spreading Machine (2 - 6 Rolls)



拉布方式



Spreading Method

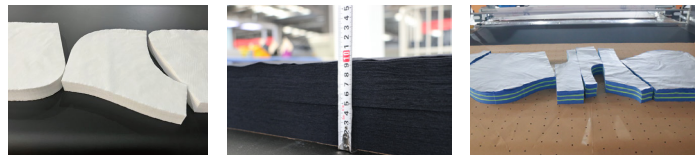

适用范围

适用于座椅、箱包、户外家居(家具)、医疗用品的自动拉布。

Application

Suitable for automatic fabric spreading of seats, bags, outdoor furniture and medical supplies.

机器特点

- 液晶触控屏：轻松设定拉布方式、长度、速度、数量及段落，操作直观简便。
- 无料自动停机：布料拉完时系统自动停止作业，并自动返回拉布原点。
- 智能裁刀装置：智能可调节裁刀装置，速度、距离可调，裁切整齐稳定。裁刀和主机可以快捷简单的进行拆装。
- 布料预松装置：预先释放布料张力后再拉放，消除拉布张力并保持拉布质量的一致性。
- 自动对边装置：在拉布运作过程中可以正确做到自动对边，提升拉布质量。
- 独立式置布架：可进行2~6卷布同时作业。
- 柔性拉布装置：柔性夹布结构，模拟人手夹布动作，自适应拉布时面料张力，杜绝拉布时张力过大面料卷缩问题。

Features

- LCD Touchscreen: Easily set the spreading method, length, speed, quantity and sections, with intuitive as well as simple operation.
- Automatic Stop When Material Runs Out: Automatically stops operation when the fabric is finished spreading and returns to its starting point.
- Smart Cutting Device: The intelligent adjustable cutting device allows for adjustable speed and distance, ensuring neat and stable cuts. Cutting unit and main unit can be quickly and easily detached or attached.
- Fabric Pre-Relaxation Device: Releases fabric tension in advance before spreading, eliminating spreading tension and maintaining consistency in spreading quality.
- Automatic Edge Alignment Device: Ensures accurate automatic edge alignment during the spreading process, enhancing the quality of the spread fabric.
- Independent Fabric Rack: 2-6 rolls of fabric can be operated at the same time.
- Flexi-spread Device: Flexible fabric clamping structure, simulating manual fabric clamping, auto-sensing fabric spreading tension, eliminating fabric curling problem due to excessive tension during spreading.

全自动拉布机（2-6卷）
Automatic Spreading Machine (2 - 6 Rolls)

主要装置 Main Features

- 2~6卷布同时拉布，提升产能
 - 最大20米超长拉布距离
 - 重型大型布卷作业
 - 独立布卷对边作业
 - 柔性拉布装置
 - 独立送布系统
 - 无张力拉布
- Simultaneous spreading of 2 to 6 fabric rolls, increasing production capacity.
 - Maximum spreading length of 20 meters, ideal for long operations.
 - Heavy-duty operation for large fabric rolls.
 - Independent edge alignment for fabric rolls.
 - Flexi-spreading device.
 - Independent fabric feeding system.
 - Tension-free fabric spreading.

主要参数 Parameters

型号： Model:	GOA-SM,L-6-1000×1600-C-N80-NA-3P380
电源电压： Voltage:	3P 380V
马达功率： Motor Power:	11kW
拉布宽度： Maximum Fabric Width:	1600mm
裁台宽度： Table Width:	1830mm
拉布长度： Spreading Length:	15000mm
布卷重量： Fabric Weight:	450kgs max.
布卷直径： Diameter of Fabrics:	1200mm
行走速度： Moving Speed:	106m/min max.
机器尺寸： Machine Dimensions(LxWxH):	12200×2800×1700mm
拉布高度： Stacking Height:	单拉200mm One-way 200mm

机器尺寸可定制/Machine dimensions can be customized

天津再登高智能制造有限公司

地址：天津宝坻经济开发区天宝南环路3号B楼-2号
邮箱：sales@raiseagaintech.com
网址：www.raiseagaintech.cn

400-166-8581

Tianjin RaiseAgain SM CO., Ltd.

Address: No.2,Block B-3, Tianbao Nanhuan Road, Baodi Economic
Development Area, Tianjin, China. 0086-22-6035 9933
Email: sales@raiseagaintech.com www.raiseagaintech.com