


全自动360°双针厚料 模板缝纫机

Fully Automatic 360° Double-Needle Heavy-Duty Template Sewing Machine



适用范围

汽车座椅、汽车安全气囊、汽车内饰，家居等双线厚料缝纫。

Application

Automotive Seats, Automotive Airbags, Automotive Interiors, Home Furnishings, and other double-thread heavy-duty sewing.

机器特点

- 机头采用杜克普原装机头配件组装，独立驱动控制，可实现360°旋转缝制，确保双线缝制质量；
- 双针针位有6/8/10MM可选，满足双线或双色不同线产品缝制；也可拆掉一根针，用于单针缝制使用；
- 3倍超大旋梭，减少更换梭芯频率，提高生产效率；
- 机头可定制自动升降，升降高度达100mm，其他高度可以定制。（有电机/气动升降可选）；
- 全伺服电机控制，设备稳定性高，保证高品质缝制效果；
- 大容量存储空间，线迹文件存储不受限；
- 具有自动剪线、紧急停机、断线检测、底线计数、输入数据保存、缝制方向自动调节等功能。

Features

- Machine head is assembled using original Dürkopp head components with independent drive control, enabling 360° rotational sewing to ensure high-quality double-thread stitching.
- Double-needle spacing options of 6mm, 8mm, and 10mm are available to accommodate different double-thread or dual-color sewing requirements; one needle can also be removed for single-needle sewing.
- Equipped with an 3X oversized rotary hook to reduce the frequency of bobbin changes and improve production efficiency.
- Machine head can be customized with automatic lifting, with a lifting height of up to 100mm; other heights can be customized. (Motorized or pneumatic lifting options are available.)
- Fully servo motor control ensures high equipment stability and guarantees high-quality sewing results.
- Large-capacity storage space with no limits on stitch file storage.
- Features include automatic Thread Trimming, Emergency Stop, Thread Breakage Detection, Bobbin Thread Counting, Data Input Saving, and Automatic Adjustment of Sewing Direction.


全自动360°双针厚料模板缝纫机

Fully Automatic 360°Double-Needle Heavy-Duty Template Sewing Machine


主要参数 Parameters

型号 Model	GOA-IS,HM-R-1-1300×1000-FD-HR3-RH360-CK-1P220		
缝制范围: Sewing Area:	1300×1000MM	线迹: Stitch Type:	双针锁式 Double-needle Lockstitch
机针: Needle Type:	DP×17 9-24#	缝制速度: Sewing Speed:	200-3000RPM
线迹范围: Stitch Length Range:	0.5-2.0MM	剪线方式: Thread Trimming Method:	圆刀剪线 Rotary Blade Trimming
外压方式: Clamping Method:	气动/夹盘式 Pneumatic/Clamp-style	压脚提升范围: Presser Foot Lifting Range:	0-25MM
界面语言: Interface Languages:	简体中文、繁体中文、英语、日语、韩语、越南语 Simplified / Traditional Chinese, English, Japanese, Korean, Vietnamese	条码读取器: Barcode Reader:	USB条码读取器 (HID) USB Barcode Reader (HID)
电压: Voltage:	单相220V, 50HZ Single-phase 220V, 50Hz	功率: Power:	3.75KW
气压: Air Pressure:	0.6MPa	机器尺寸: Machine Dimensions:	2580×2310×1730mm
包装尺寸: Packaging Dimensions:	2160×1250×1700mm	净/毛重: Net/Gross Weight:	850/980kg

主要配置 Main Configuration

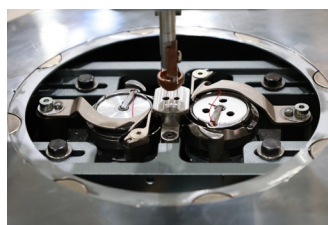


3倍超大旋梭
3X Oversized Rotary Hook

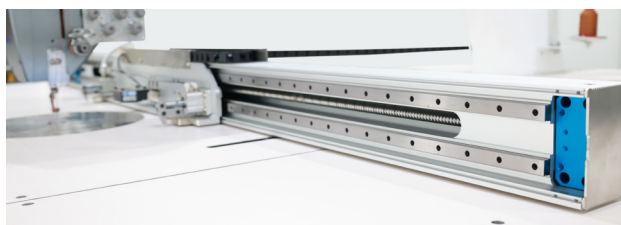


上银导轨、TBI丝杆
HIWIN Linear Guide Rails, TBI Ball Screws



HID条形码读取器
HID Barcode Reader

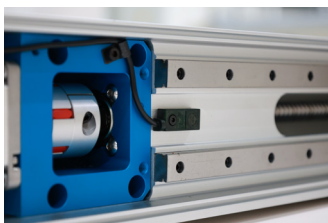

X向行程距离感应器
X-axis Travel Distance Sensor

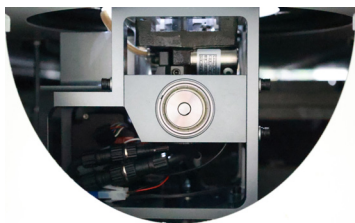

下机头组件
Lower Machine Head Components



底线绕线器
Bobbin Winder

天津再登高智能制造有限公司

地址: 天津宝坻经济开发区天宝南环路3号B楼-2号

邮箱: sales@raiseagaintech.com

网址: www.raiseagaintech.cn

400-166-8581

Tianjin RaiseAgain SM CO., Ltd.

Address: No.2,Block B-3, Tianbao Nanhuan Road, Baodi Economic Development Area, Tianjin, China. **0086-22-6035 9933**

Email: sales@raiseagaintech.com

www.raiseagaintech.com

20251020