


单色单幅电脑绗绣机 (A型)

- 最高转速1000RPM,
- 采用定制大旋梭, 线容量是普通旋梭的4倍

- Maximum speed: 1000 RPM
- Equipped with a custom large bobbin, the thread capacity is 4 times that of a normal bobbin.

Computerized Single-color Single Roll Quilting and Embroidery Machine (Model A)

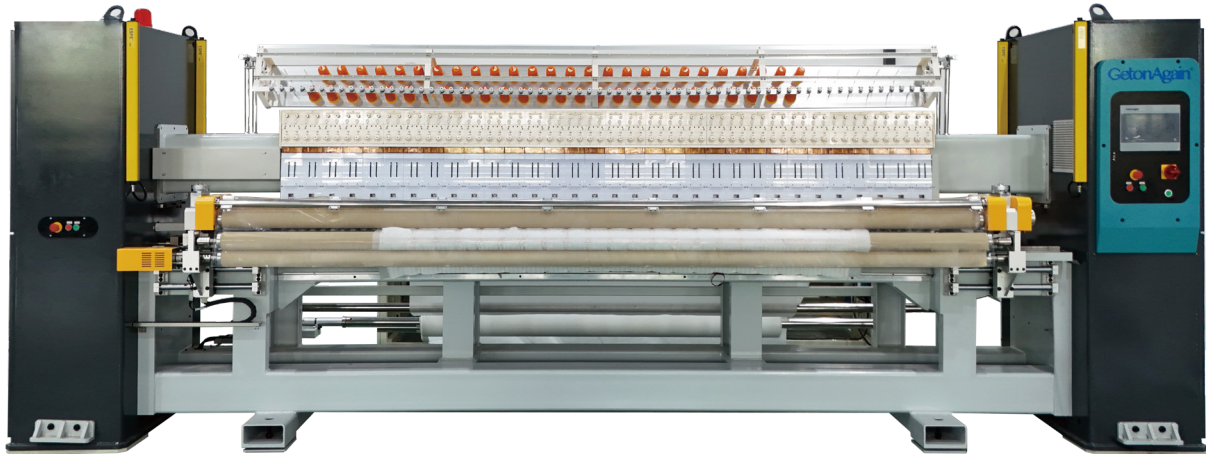


适用范围

夏凉被、床罩、床垫保护罩、枕套、毛毯、服装、汽车座椅套、汽车脚垫、家具软包等。

Application

Summer quilts, bedspreads, mattress protectors, pillowcases, blankets, garments, car seat covers, car floor mats and furniture upholstery, etc.



机器特点

- 采用新型高速双针绗绣机头, 零件表面做镀膜工艺处理, 最小针距 50.8mm(2"); 双针杆独立控制或手动控制, 自由激活、锁定; 可根据生产要求自主快速地实现针距任意隔头的切换, 满足不同绗绣花型的高效生产要求。
- 最高转速1000RPM, 推荐工作速度: 750-850RPM。
- 采用定制大旋梭, 线容量是普通旋梭的4倍, 减少底线更换频率, 提高生产效率。
- 全伺服系统驱动, 加大传动减速比设计, 机器性能大幅度提升。
- 轴承、丝杠、皮带、开关、传感器等电器元器件均采用知名品牌。
- 自动断线检测, 提高产品品质, 具有补修功能, 避免大幅面返工操作。
- 自主研发绗绣控制系统, 10.4英寸触摸屏窗口化界面。
- 可选用专业绗绣打版设计软件, 支持花样任意设计, 宜学宜用。

Features

- Equipped with a new high-speed double-needle quilting and embroidery machine head, with surface coating treatment for parts. The minimum needle spacing is 50.8mm (2"). The double needle bars can be controlled independently or manually, allowing free activation and locking. Needle spacing adjustments or switching to alternative heads can be quickly executed according to production requirements, meeting the high-efficiency production demands for various quilting and embroidery patterns.
- Maximum speed: 1000 RPM; recommended operating speed: 750-850 RPM.
- Uses a custom large rotary hook, with a thread capacity FOUR times that of a standard rotary hook, reducing the frequency of bobbin changes and improving production efficiency.
- Fully servo-driven system with an optimized transmission and gear reduction ratio, significantly enhancing machine performance.
- Bearings, lead screws, belts, switches, sensors, and other electrical components are sourced from well-known brands.
- Features automatic thread breakage detection to improve product quality, along with a pattern repair function to avoid large-scale rework operations.
- Independently developed quilting and embroidery control system with a user-friendly 10.4-inch touch screen interface.
- Compatible with professional embroidery/quilting/quilting-embroidery design software, supporting flexible pattern customization. Easy to learn and operate.

单色单幅电脑绗绣机 (A型)

Computerized Single-color Single Roll Quilting and Embroidery Machine (Model A)

推荐型号 Model

推荐型号 Model	单排针数 Number of Needles	直线落针宽度 Needle-to-Needle Quilting Width	针距 Needle Distance	机器占地尺寸 Installation Size (L×W×H)
GOAQE-NM-SFE-A-164-305x3200-B-2"CN(50.8)-VR4-NA-3P380	64	3200mm	50.8mm	5600mm×2000mm×2050mm
GOAQE-NM-SFE-A-148-305x2387-B-2"CN(50.8)-VR4-NA-3P380	48	2387mm	50.8mm	4800mm×2000mm×2050mm
GOAQE-NM-SFE-A-132-305x1575-B-2"CN(50.8)-VR4-NA-3P380	32	1575mm	50.8mm	4000mm×2000mm×2050mm
GOAQE-NM-SFE-A-144-305x3276-B-3"CN(76.2)-VR4-NA-3P380	44	3276mm	76.2mm	5600mm×2000mm×2050mm

机器参数 Parameters

隔头针距: Alternate Needle Spacing:	101.6mm (4"), 152.4mm (6"), 203.2mm (8"), 254mm (10"), 304.8mm (12")	存储针数: Stitches Storage:	1600万 16 million
缝制厚度: Stitching Thickness:	≤300GSM	针迹长度: Stitch Length:	0.1mm-12.7mm
功率: Power:	10.5KW	电压: Voltage:	380V, 50Hz


主要配置 Configuration



人机交互界面
Human-Machine Interface



安全光幕
Safety Light Curtain

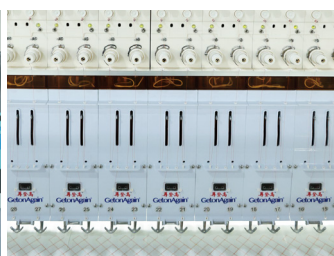

新款高速机头
New High-Speed Sewing Head




4倍原装进口旋梭/梭壳/梭芯
4x Durable Genuine International Brand
Rotary Hook/Bobbin Set

机器选配 Optional



自动送料
Automatic Feeding

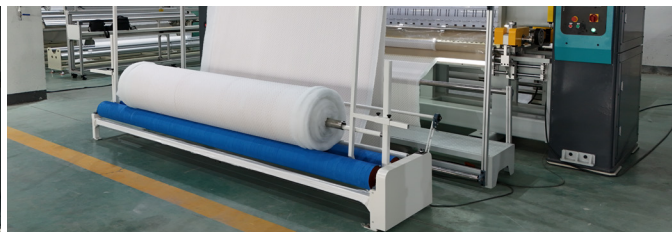

自动收料
Automatic Collecting Rack

天津再登高智能制造有限公司

地址: 天津宝坻经济开发区天宝南环路3号B楼-2号
邮箱: sales@raiseagaintech.com
网址: www.raiseagaintech.cn

400-166-8581

Tianjin RaiseAgain SM CO., Ltd.

Address: No.2,Block B-3, Tianbao Nanhuan Road, Baodi Economic
Development Area, Tianjin, China. **0086-22-6035 9933**
Email: sales@raiseagaintech.com www.raiseagaintech.com