再登高®
RaiseAgain™

GetonAgain®

大幅面自动送料激光裁床

Large-Format Automatic Feeding Laser Cutting Machine

应用领域

适用于服装、家纺、家具、汽车内饰、箱包、鞋帽、玩具、工业纺织品等领域柔性材料的自动化切割。

Application

Suitable for automated cutting of flexible materials in various fields such as apparel, home textiles, furniture, automotive interiors, luggage, footwear & headwear, toys, and industrial textiles.

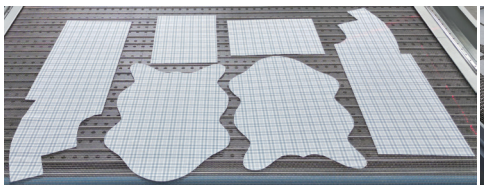




性能特点

- 无接触激光切割，图形不限，适用面料广泛，切割灵活无局限。
- 全自动送料系统支持整卷面料连续上料,实现不间断自动化裁切。
- 切口平整光滑无毛边。
- 恒定光路设计确保光路稳定不偏移，保障高精度切割。
- 可对接CAD及超级排料软件，实现设计、排料、裁切全流程无缝衔接。
- 断电续切功能，确保意外断电，恢复供电即可接续加工。
- 智能人机交互，动态可视化轨迹，工时实时预览，操作简单高效。

Features

- Non-contact laser cutting with no pattern restrictions, applicable to a wide range of fabrics, offering flexible and unlimited cutting capabilities.
- Fully automatic feeding system supports continuous loading of entire fabric rolls, enabling uninterrupted automated cutting.
- Cut edges are smooth and neat with no fraying.
- Constant optical path design ensures stable beam alignment without deviation, guaranteeing high-precision cutting.
- Seamlessly integrates with CAD and super nesting software for a fully connected workflow from design and marker to cutting.
- Power-off resume function ensures processing can continue after power restoration in case of unexpected shutdown.
- Intelligent human-machine interface with dynamic visualized paths and real-time working time preview for simple and efficient operation.

再登高®
RaiseAgain™

GetonAgain®

大幅面自动送料激光裁床
Large-Format Automatic Feeding Laser Cutting Machine

常规型号 Models

产品型号&系列 Models & Series	工作面积 Working Area	机器尺寸 Machine Size (L×W×H)
GOA-LC,L	2500mm×1600mm	4300mm×2400mm×1200mm
GOA-LC,L	2500mm×1800mm	4300mm×2600mm×1200mm
GOA-LC,L	3500mm×1600mm	5300mm×2400mm×1200mm
GOA-LC,L	3500mm×1800mm	5300mm×2600mm×1200mm

参数说明 Parameters

最大工作速度: Max. Working Speed:	1500mm/s	激光功率: Laser Power:	100W/130W/150W/300W
冷却方式: Cooling Method:	水冷却 Water cooling	供电电源: Power Supply:	AC220V/110V±10%, 50Hz
激光类型: Laser Type:	国产CO_2玻璃激光管/进口金属射频管 China made CO_2 glass laser tube/international brand metal RF tube	切割精度: Cutting Accuracy:	±0.1mm
工作环境: Operating Environment:	温度: 5~40℃ 湿度:5~80% 无凝水,无灰尘 或灰尘较少 Temperature: 5~40℃, Humidity: 5~80% (Non-condensing), Dust-free or low-dust conditions		

主要配置 Main Configuration

激光切割机专用工业冷水机，具有超温报警，流量保护，水位保护等安全报警提示功能。

Dedicated industrial chiller for laser cutting machines featuring over-temperature alarm, flow protection, and water level warning functions.



传输平台发黑处理，避免激光反射。

Apply a blackened surface treatment to the transport platform to mitigate laser reflection.

国产一线品牌激光管，质量稳定，工作时间长。

China made top-tier brand Laser Tube with stable quality and long service life.



传动方式：龙门双伺服电机齿条齿轮传动。

Drive Method: Gantry-type, dual servo motor, rack and pinion drive.

选配装置 Optional



画笔功能

Brush Feature



安全防护传感器

Safety Sensor

自动送料机

Automatic Feeding Machine.

天津再登高智能制造有限公司

地址：天津宝坻经济开发区天宝南环路3号B楼-2号
邮箱：sales@raiseagaintech.com
网址：www.raiseagaintech.cn
400-166-8581

Tianjin RaiseAgain SM CO., Ltd.

Address: No.2,Block B-3, Tianbao Nanhuan Road, Baodi Economic Development Area, Tianjin, China. **0086-22-6035 9933**
Email: sales@raiseagaintech.com www.raiseagaintech.com

20260310