



框式单头电脑绗缝机 (撑布带款)


Computerized Single Head Quilting Machine - Frame Type (Belt Support)



自动升降机头
Auto lifting head

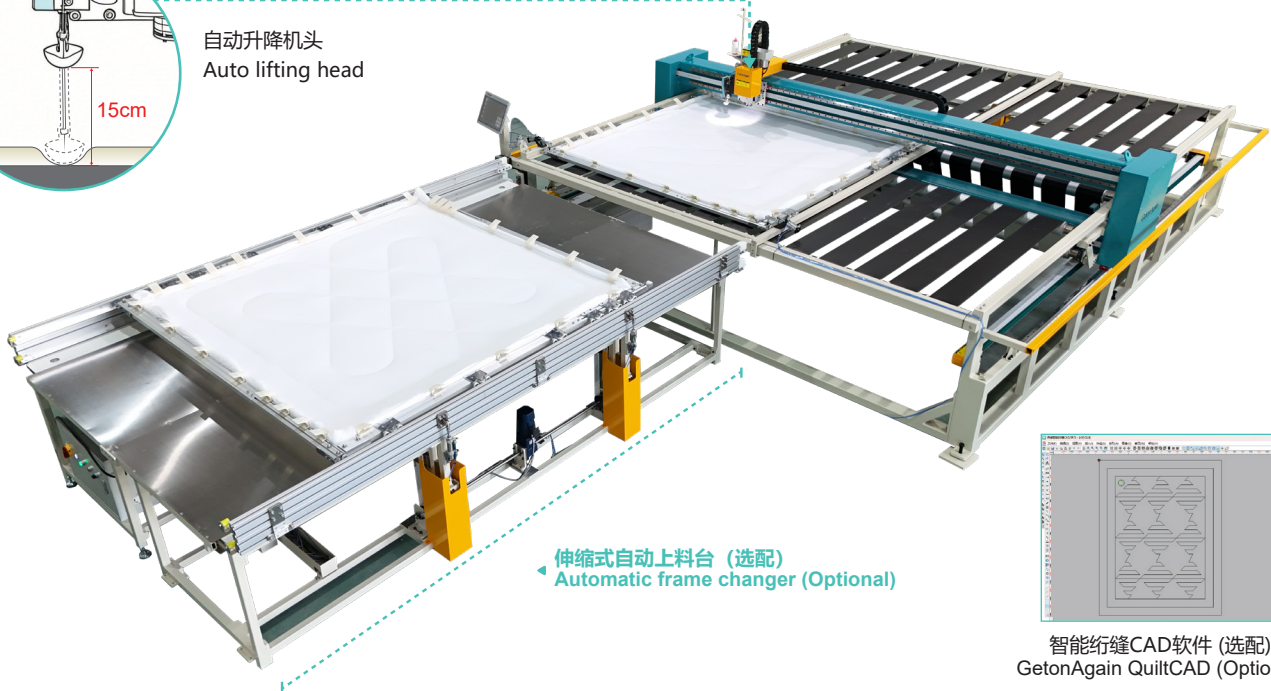

伸缩式自动上料台 (选配)
Automatic frame changer (Optional)

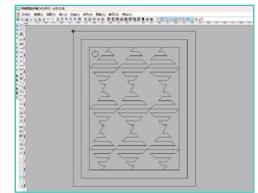

智能绗缝CAD软件 (选配)
GetonAgain QuiltCAD (Optional)

应用领域

适用于大面积绗缝且质量要求较高的花型产品，以及材料较重产品的绗缝加工。

Application


Suitable for large-area quilting of high-quality pattern products, or products with heavier materials.



沙发
Sofas



床头板
Headboards

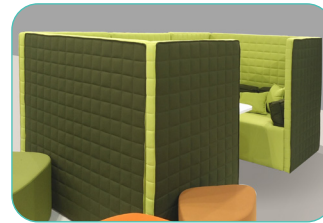

会议围挡
Conference Enclosures



重力被
Gravity Quilts

性能特点

- 最高速度3000转/分钟
- 绗缝机头与机架全移动进行绗缝，极大减少机器占地尺寸，提高厂房利用率。
- 全区域随动撑布带，有力支撑较重的绗缝材料，有效避免材料下塌引起填充物移动或花样变形。
- 厚料专用绗缝机头，独立压脚驱动，适合超厚材料的绗缝。
- 全直线导轨移动，确保针梭间隙稳定，确保绗缝线迹稳定和提升产品质量。
- 原装进口日本佐文大旋梭及梭壳，性能可靠，减少更换底线频率。
- 全伺服电机控制，提供强大准确驱动力，确保绗缝精度。

Features

- Maximum speed up to 3000 RPM.
- Frame-Fixed design, the sewing head and machine bridge move respectively, significantly reducing machine footprint and improving factory space utilization.
- All-area-belt supports the heavy material during quilting, effectively preventing material sagging that cause filler movement or pattern deformation.
- Heavy-duty quilting head with independent presser foot drive, suitable for extra-thick materials.
- Full linear guide rail moving system, ensures stable needle and hook clearance, enhances stitching stability and quilting quality.
- Original Japan Koban brand jumbo rotary hook and bobbin case for reliable performance and reduced bobbin change frequency.
- Full servo motor control provides powerful and accurate driving force, ensuring quilting precision.

框式单头电脑绗缝机 (撑布带款)

Computerized Single Head Quilting Machine - Frame Type (Belt Support)

常规型号 Models

型号 Models	系列 Series	头数 Sewing Head	最大绗缝面积 Max. Quilting Area(mm)	机器占地尺寸 Machine Installation Size (L×W×H)(mm)
GOA-QP	S1S	1	2500×2600	4460×4030×1500
GOA-QP	S1S	1	2600×2800	4540×4100×1500
GOA-QP	S1S	1	2800×3000	4680×4340×1500
GOA-QP	S1S	1	3200×3200	5040×4800×1500

参数说明 Parameters

针迹: Stitch Type:	锁式 lock stitch	步长: Stitch Length:	2mm-6mm	机针范围: Needle Type:	#14-#21
最大绗缝密度: Quilting Thickness:	1200g/m ²	最高速度: Max. Quilting Speed:	3000RPM	功率: Power:	4kW

主要配置 Main Configuration


(以下配置仅供参考, 设备最终配置以制造商出厂标准为准)
(Below are for reference, pls. consult with GetonAgain for the final configurations)




15寸触摸屏操作
15-inch touchscreen
computer control



15cm自动升降机头
Lifting sewing head up to 15cm

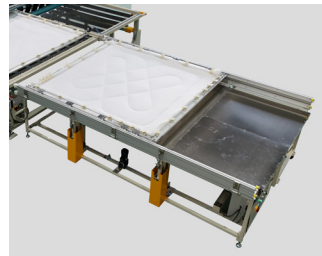

伸缩式自动上料台 (选配)
Automatic frame changer (Optional)

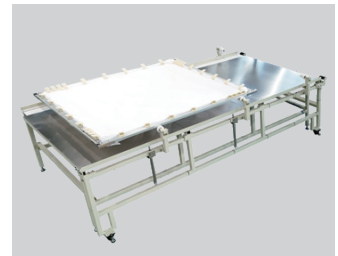

气擎换框台 (选配)
Pneumatic Quilt Frame Changer
(Optional)

- 机头、机架全移动设计
- 全伺服电机驱动
- 进口大旋梭、梭芯、梭壳
- 直线导轨移动
- 自动润滑功能
- 自动底面线剪线功能

- 自动底线计数
- 面线断线检测功能
- 自动补缝功能, 快进、快退功能;
- 花型预览、产量统计功能。
- 【选配】自动夹线装置
- 【选配】红外安全防护装置

- All-moving design for both sewing head and machine bridge
- Full servo motor drive
- Koban Jumbo rotary hook, bobbin, and bobbin case
- Linear guide rail movement
- Automatic lubrication system
- Automatic thread trimming

- Automatic bobbin thread counting
- Top thread break detection
- Automatic back-tacking function, fast forward/reverse function
- Pattern preview and production statistics function
- [Optional] Quilting CAD software
- [Optional] Infrared safety system

天津再登高智能制造有限公司

地址: 天津宝坻经济开发区天宝南环路3号B楼-2号
邮箱: sales@raiseagaintech.com
网址: www.raiseagaintech.cn

400-166-8581

Tianjin RaiseAgain SM Co., Ltd.

Address: No.2,Block B-3, Tianbao Nanhuan Road, Baodi Economic Development Area, Tianjin, China. **0086-22-6035 9933**
Email: sales@raiseagaintech.com www.raiseagaintech.com