

电脑多头旋梭绗缝机 (E型)

Computerized Multi-head Rotary-hook Quilting Machine (Model E)





应用领域 Application

适用于冬被, 夏凉被, 被盖, 床垫保护垫, 床垫等产品的多头绗缝。

Suitable for multi-head quilting on winter comforter, summer quilts, bed covers, mattress protector, mattress, etc.



设备连线应用 Device Connection Application

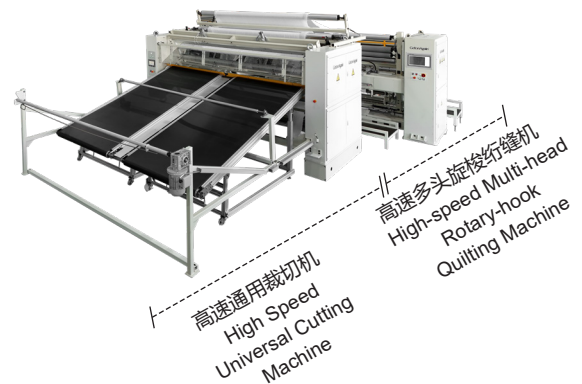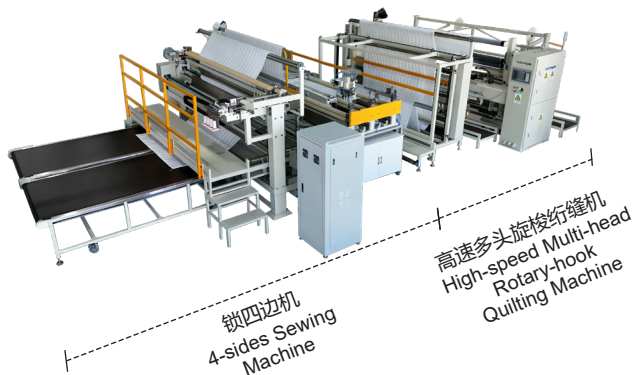

性能特点

- 大旋梭多头绗缝机, 工作速度高达1500转/分, 是普通飞梭绗缝机速度的2~3倍, 大大提高了工作效率。
- 专用5倍大旋梭, 底线容量更大, 减少更换频率, 线迹美观, 无丢针、不起环。
- 触摸屏操作, 图形化界面, 清晰直观, 所有功能可视于同一界面。
- 全伺服电机驱动, 控制精准, 动力强劲。
- 上下针排间距可以从3-9英寸任意调节, 下针排x向可以移动半个针距, 从而组合出不同尺寸花型的绗缝排针, 尤其是一些非标尺寸图案, 可以做到与众不同。
- 立姿换梭, 轻松快捷, 改善工人劳动强度。
- 专用的上料结构, 让机器在不同工况下都可以保证缝制质量, 结构紧凑, 操作方便。
- 特有的雾化加油系统, 对每个机头和旋梭做到大雾量润滑, 保证高速工作的稳定性。

Features

- Double-row lock-stitch multi-head quilter, with large rotary hook, max. speed of 1500 rpm, between two and three times of normal shuttle quilting machine, greatly improves work efficiency.
- 5-time jumbo rotary hook, less bobbin changing frequency; beautiful stitches, no lost stitch, no thread loops.
- Touch screen operation, graphical interface, clear and intuitive, all functions can be seen on the same interface.
- Full servo motor driving system, precise control and strong power.
- The interval between the upper and lower needle bars can be adjusted to any value from 3 to 9 inches. The lower needle bar can move half a needle pitch in the x-direction, so that quilting needle bars of different sizes and patterns can be combined, especially for some non-standard size patterns, which can achieve a unique effect.
- Bobbin change in standing position, easy and fast, reduce labor intensity.
- A dedicated feeding structure ensures sewing quality under different working conditions, featuring compact design and easy operation.
- A unique atomized oiling system provides high-volume lubrication for each machine head and rotary hook, ensuring stability during high-speed operation.

电脑多头旋梭绗缝机 (E型)

Computerized Multi-head Rotary-hook Quilting Machine (Model E)


常规型号 Models

型号 Models	系列 Series	头数 Sewing Head	头距 Head Distance	针排 Needle Row	直线落针 Straight Quilting Sewable Width	适用布幅宽度 Fabric Width	机器占地尺寸 (L×W×H) Installation Size
GOA-QC	1500D(E)	17+16	152.4mm(6inch)	双排 Double Row	2438mm	2500mm	5375×2400×2600mm

参数说明 Parameters


绗缝克重: Quilting Density:	≤1000GSM	工作速度: Working Speed:	1500RPM	旋梭: 5倍大旋梭 Rotary Hook: 5-time jumbo rotary hook
步长: Stitch Length:	2mm-6mm	绗缝厚度: Sewing Thickness:	≤50mm	电源: 三相 380V 50Hz Voltage: 3P 380V 50Hz

主要配置 Main Configuration



双排机型: 双针排间距3-9英寸任意调节,可组合出任意尺寸花型。

Double-row quilter: the distance of two needle rows are adjustable within 3-9 inches, making various unlimited size of patterns.




双排机型: 下排机头可在半个头距内整体横移,花型设计更为多样。

Double-row quilter: quilting heads in lower row could move horizontally as a whole, up to half a head distance, making the pattern design more diversified.



选用5倍大旋梭,超大底线容量,特殊表面处理,微油润滑。




5-time jumbo rotary hook, big bobbin thread capacity, special surface treatment, micro-oil lubrication.



可调压脚机构,适合不同厚度的材料绗缝。

Adjustable presser foot mechanism, suitable for quilting different thickness of materials.

105mm头距双针排机型排针效果
105mm Head distance double row pattern

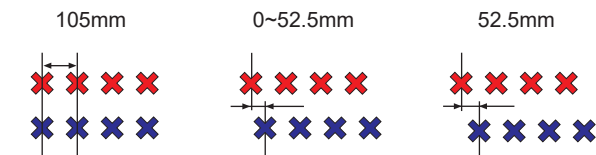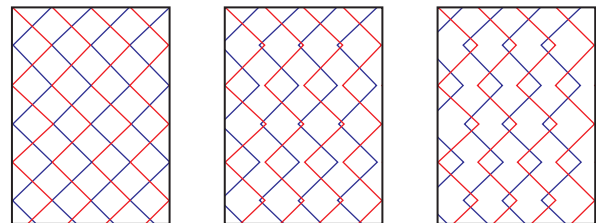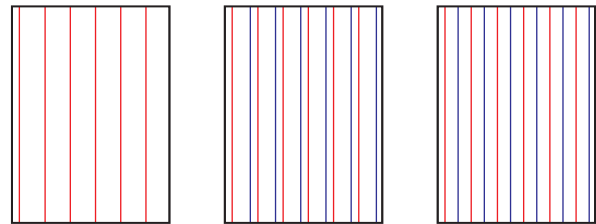

上下针排对齐
Upper/Lower needle aligned

上下针排错位
Lower needle row move to right

下针排头距居中
Lower needle row move to middle

天津再登高智能制造有限公司

地址: 天津宝坻经济开发区天宝南环路3号B楼-2号
邮箱: sales@raiseagaintech.com
网址: www.raiseagaintech.cn

400-166-8581

Tianjin RaiseAgain SM Co., Ltd.

Address: No.2,Block B-3, Tianbao Nanhuan Road, Baodi Economic Development Area, Tianjin, China. **0086-22-6035 9933**
Email: sales@raiseagaintech.com www.raiseagaintech.com