


给棉机

Fiber Feeder

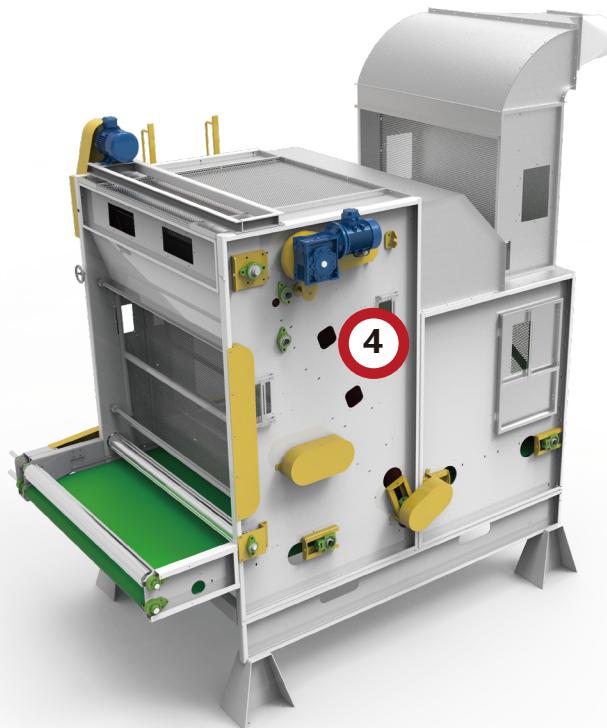

机器特点

- 将开松混合后的纤维均匀输入梳理机。
- 机架采用Q235-A钢板，模块化拼装而成。
- 角钉帘为优质木帘棒，内衬加厚帆布，周边用角钢作托帘。
- 角钉帘前后各有一条水平输送帘，选用防滑皮帘。
- 给棉箱及储棉仓分别设有2道光电，位置可调。
- 入棉口增加高位储棉仓。

Features

- Evenly feed the mixed fibers from bale opener into the carding machine.
- Machine frame is made from Q235-A steel and completed with modular assembly.
- The spiked lattice is high-quality wooden spike, inner layer with thick canvas, and border around with steel angle pieces for supporting spiked lattice.
- Horizontal conveyor belts are in the front and rear of the spiked lattice conveyor respectively, using slipping-proof leather conveyor material.
- 2 photoelectric channels are in the fiber feeding box and the fiber storage trunk respectively, their positions can be adjusted.
- Additional upper-level fiber storage cabin in the fiber inlet.

机器参数 Parameters

机幅宽度: Machine Width:	1700mm	功率: Power:	2.5kW
产量: Output:	100-400kg/h		

天津再登高智能制造有限公司

地址：天津宝坻经济开发区天宝南环路3号B楼-2号

邮箱：sales@raiseagaintech.com

网址：www.raiseagaintech.cn

400-166-8581

Tianjin RaiseAgain SM CO., Ltd.

Address: No.2, Block B-3, Tianbao Nanhuan Road, Baodi Economic

Development Area, Tianjin, China. **0086-22-6035 9933**

Email: sales@raiseagaintech.com

www.raiseagaintech.com