



## 框式单针电脑绗缝机


## Computerized Single Needle Quilting Machine-Lifting Head



自动升降机头  
Auto lifting head



智能绗缝CAD软件 (选配)  
GetonAgain QuiltCAD (Optional)

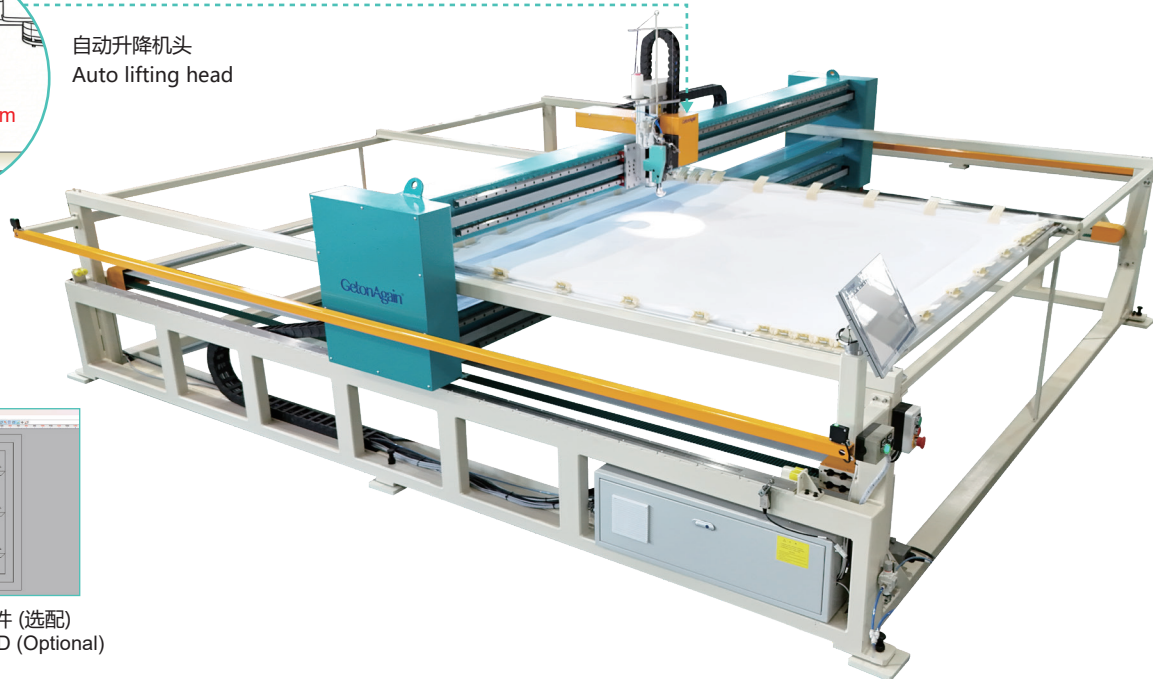


### 应用领域

适用于被子、床垫、床笠、毛毯、睡袋、单针复杂花样工艺被等家纺产品的绗缝加工。

### Application

Suitable for quilting home textile products such as quilts, mattresses, mattress protectors, blankets, sleeping bags, and single-needle complex pattern quilts.

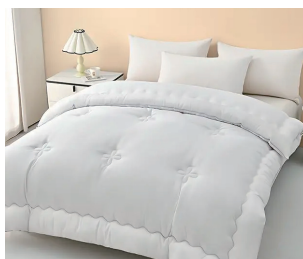

### 性能特点

- 工作速度3000转/分钟。
- 再登高自主研发绗缝机头，独立压脚驱动，适合不同厚度材料的绗缝。
- 全伺服电机控制，提供强大准确的驱动力。
- 高精度机架确保针梭间隙稳定，延长旋梭使用寿命。
- 原装进口大旋梭及梭壳，性能可靠耐用。
- 自动升降机头，绗缝结束后自动抬升，方便换料操作。
- 断线检测功能：断线自动停机，自动返回断线点续缝，有效减少物料浪费。
- 伸缩式绗缝框：可根据所需尺寸自由调整。

### Features

- Working speed up to 3000 RPM.
- RaiseAgain self-developed quilting head with independent presser foot drive, suitable for quilting materials of various thicknesses.
- Full servo motor control provides powerful and accurate driving force.
- High-precision machine structure ensures stable needle and hook clearance, extending the service life of the rotary hook.
- Japan Koban jumbo size rotary hook and bobbin case for reliable and durable performance.
- Automatic lifting sewing head automatically rises after quilting for easy material change.
- Thread break detection function: automatically stops when thread breaks; automatically returns to the break point to continue quilting, effectively reducing material waste.
- Extendable quilting frame can be adjusted according to quilts size.

## 框式单针电脑绗缝机 Computerized Single Needle Quilting Machine-Lifting Head 常规型号 Models

型号 Models	系列 Series	头数 Sewing Head	最大绗缝尺寸 Max. Quilting Size (mm)	最大物料尺寸 Max. Quilting Fabric Size (mm)	机器占地尺寸 Machine Installation Size (L×W×H) (mm)
GOA-QP	S1S	1	2500×2600	2750×2850	3710×3960×1700
GOA-QP	S1S	1	2600×2800	2900×3100	3810×4160×1700
GOA-QP	S1S	1	2800×3000	3100×3300	4010×4360×1700
GOA-QP	S1S	1	3200×3200	3500×3500	4410×4560×1700

### 参数说明 Parameters


针迹: Stitch Type:	锁式 Lockstitch	针步: Stitch Length:	2mm-6mm	机针范围: Needle:	#14-#21
最大绗缝密度: Max. Quilting Weight:	1200g/m <sup>2</sup>	最大绗缝厚度: Max. Quilting Thickness:	50mm	功率: Power:	4kW
最高速度: Max. Sewing Speed:	3000转/分钟 3000RPM	可选电源: 单相110V/50Hz、单相220V/50Hz、三相220V/50Hz、三相380V/50Hz Optional Power: 1P 110V/50Hz, 1P 220V/50Hz, 3P 220V/50Hz, 3P 380V/50Hz			

### 主要配置 Main Configuration


(以下配置仅供参考, 设备最终配置以制造商出厂标准为准)  
(Below are for reference, pls. consult with GetonAgain for the final configurations )



15寸触摸屏  
15-inch touchscreen  
computer control

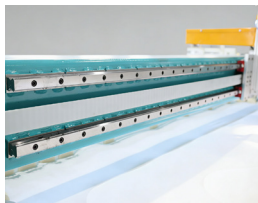

高精直线导轨, 保证机头、鞍架高速运行平稳  
High precision linear guide rails ensure the sewing head and saddle running smoothly at a high speed

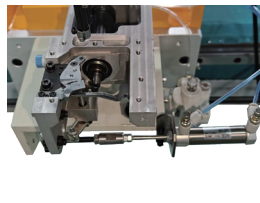

稳定可靠的动刀剪线系统  
Stable and reliable moving knife for thread trimming system




拖链结构, 结实耐用, 使用寿命长。  
Drag chain structure, strong and durable, long service life



伺服电机驱动, 绗缝精度更高  
Driven by Panasonic servo motor, quilting accuracy is higher




雾化全自动加油系统  
Atomization lubricating system

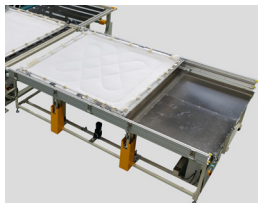

伸缩式自动上料台 (选配)  
Automatic frame changer (Optional)



气擎换框台(选配)  
Pneum-Quick Frame Changer (Optional)

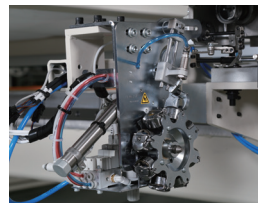

自动换梭 (选配)  
Automatic bobbin changer (Optional)



红外线 (选配)  
Infrared safety system (Optional)

### 天津再登高智能制造有限公司

地址: 天津宝坻经济开发区天宝南环路3号B楼-2号  
邮箱: sales@raiseagaintech.com  
网址: www.raiseagaintech.cn

**400-166-8581**

### Tianjin RaiseAgain SM Co., Ltd.

Address: No.2,Block B-3, Tianbao Nanhuan Road, Baodi Economic Development Area, Tianjin, China. **0086-22-6035 9933**  
Email: sales@raiseagaintech.com www.raiseagaintech.com