


烫平机

Ironing Machine

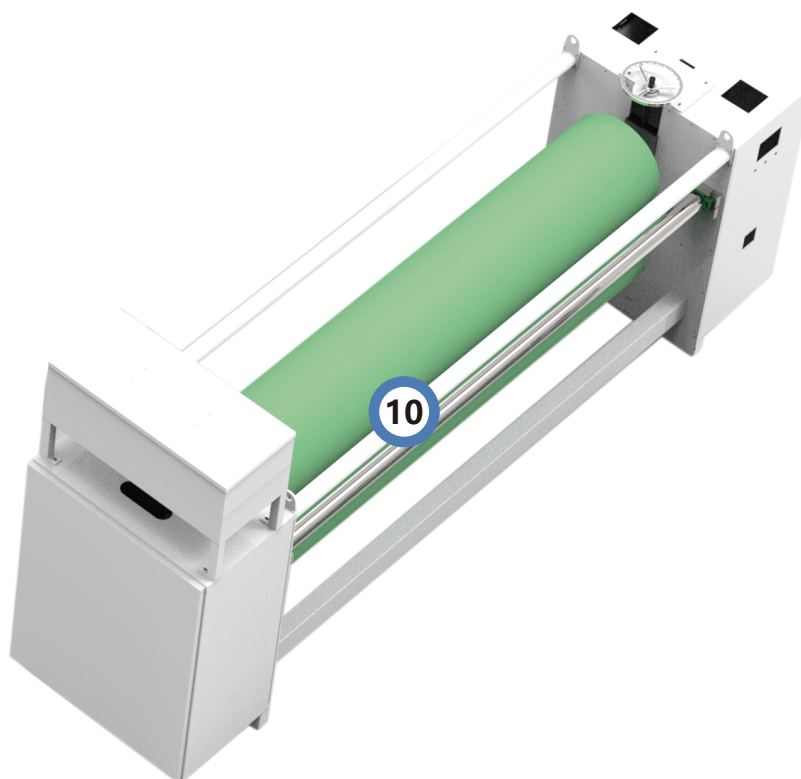

机器特点

- 对无胶棉、喷胶棉表面进行烫光，使表面平整。
- 机架主体采用优质钢板焊接而成。
- 两辊立式，以电加热加热导热油，保持温度。
- 下辊固定，上辊手动升降，升降范围100mm。
- 导热油需客户自己提供导热油300公斤（L-QD350）。

Features

- To iron on the thermal bonded-wadding to make the surface flat and neat.
- Machine frame main body is welded with high-quality steel.
- Two rollers set in vertical, heating the thermal oil by electric heating to keep the temperature.
- Lower roller is fixed, upper roller can be manually lifting up or down within 100mm.
- Customer needs to prepare thermal transfer oil themselves. Thermal oil 300kg (L-QD350).

机器参数 Parameters

机幅宽度: Machine Width:	2700mm	传动功率: 3kW变频调速/2.5kw-3kw×18PCS 加热管 Drive Power: 3kW inverter & 2.5kW-3kW ×18pcs heating tube
烫光辊直径: Dia. of Roller:	φ550mm	总功率: 48kW (以加热管2.5kw计算) Total Power: 48kW Counted by 2.5kW heating tube

天津再登高智能制造有限公司

地址: 天津宝坻经济开发区天宝南环路3号B楼-2号

邮箱: sales@raiseagaintech.com

网址: www.raiseagaintech.cn **400-166-8581**

Tianjin RaiseAgain SM CO., Ltd.

Address: No.2,Block B-3, Tianbao Nanhuan Road, Baodi Economic Development Area, Tianjin, China. **0086-22-6035 9933**

Email: sales@raiseagaintech.com

www.raiseagaintech.com